

Contents	
I. Product Packing List	1
II. Appearance Brief	2
III. Product Specifications	3
IV. Product Instructions	4
1. APP Download and Installation	4
2. Accounts Registration	5
3.1 QR Code Net-paring (Recommendation) ·····	6
3.2 QR Code Net-paring (Recommendation) ·····	7
4. Reset Camera	8
5. Family Sharing Setting	9
V. Operation Guide	10
1. Interface Introduction	10
2.1 Detection Alarm Messages	11
2.2 Video Cloud Storage ·····	11
2.3 Sites	12
2.4 Features	12
2.5 Auto-Tracking Movement	13
2.6 Playback	13
2.7 Sites Patrol	14
3. Multi-View	15
4.1 Basic Settings ·····	16
4.1-1 Basic Function Settings	16
4.2 Detection Alarm Settings	17
4.3 Memory Card Settings ·····	18
VI. Help Center&More Service	19
VII. Installation Instructions	20
VIII. Troubleshooting	21
IX. Legal Declaration	23
X. After-Sales Service Support	24
XI. Requirements for Power Supply	24
XII. Warranty Description	25


# I. Product Packing List \_\_\_\_ (9) 1 Camera 3 Expansion 3 Screws 1 Power Cable Bolts 1 Bracket <sup>3</sup> $\square$ Image: Second construction of the processing se Power 1 Ruler 1 Specification 1 Quality Adapter 2 Ruler 1 Specification Certifica 1

### 2.3 Sites

Max save 6 site points. Just click on the image of the favorite, the camera will automatically turn to that location. Support timing to any site, the camera will automatically turn to the site when time is up.

### 2.4 Features

Direct quick operation some function buttons. Motion Tracking: Turn on motion tracking, the camera will follow the movement of the object when it detects the object is moving.

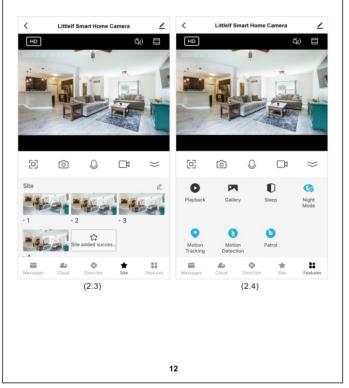

# IX. Legal Declaration

### All Right Reserved

The copyright of the instructions is owned by Shenzhen Skyline Security Co., Itd. Others are not allowed to plagiarize and embezzle.

## Trademarks Statement

Littlelf trademark ownership is owned by Shenzhen Skyline Security Co Itd. Other trademarks covered by this manual are owned by their respective owners.

### Disclaimer


The products (including hardware, software, firmware, etc.) described in this manual (including its hardware, software, firmware, etc.) should be provided in accordance with the "status quo". As for the possibility of defects, errors, or failures, Littlelf does not provide any form of express or implied warranty, including but not limited to the merchantabilit the assurance that the person is applicable to a particular purpose.

if it involves Internet services when using the product described in this manual, you may be affected by the instability of various links, and may be caused by computer viruses, hacker attacks, system instability, and other incompatible factors that cause the software to fail to achieve the desired results, and may lead to you because of incorrect operation or other reasons. For personal information or data leakage or loss, you should strengthen your personal information and take all the relevant risks yourself.

When using this product, please strictly follow the applicable law. You agree that this product shall be used only for civil use and shall not be used to infringe upon the rights of third parties, to use in medical / safety device or other applications which may cause life danger or injury to life, or weapons of mass destruction, chemical or biological weapons, nuclear explosions or any unsafe nuclear energy use or dangerous or unhuman itarian use. Any loss or liability arising from the above use will be at your

If the above content conflicts with the applicable law, the law shall prevail.

23

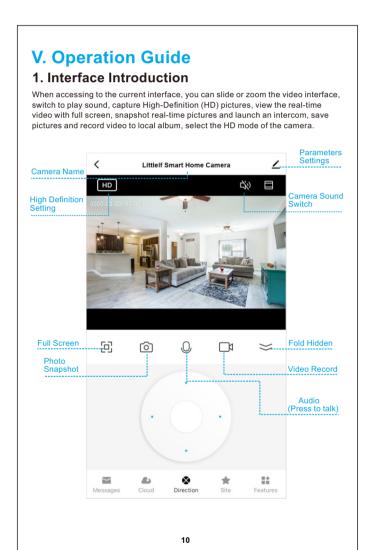

# VIII. Troubleshooting

### 1) APP can't be registered successfully

- 1. Please check if the network of the mobile phone is normal;
- sase tick the software service agreement and privacy policy; ease check if the verification code is in the spam mail;
- lease use WIFI to register if mobile network cannot be registered. If the mobile etwork and WIFI prompts cannot obtain the server address, please check if
- other software can be used normally; 5. During installation, please allow the app to obtain your location and all
- permissions, the system will automatically arrange the best server; 6. If above solutions still can't be effective, we recommend you to uninstall and install the app again, the current location and all permissions are allowed durin the installation)
- Unable to connect to the network
- A) Unable to connect to WiFi:
- Please enable the DHCP of the router; 2. Please make sure the camera is not in the blacklist in MAC settings of the router Turn off the 5GHz wifi in the router (Note: Please contact the router manufacturer if you can't turn off the 5Ghz wifi);
- After connecting to the 2.4GHz wifi, please check your mobile phone if can access the Internet;
- 5. Make sure the network of your mobile devices are under the same network router of the camera;
- 6. After the network is normal, reset the camera and reconnect. B) Unable to connect to wired:
- Please enable the DHCP of the router;
   Please make sure the camera is not in the blacklist in MAC settings of the router;
   Connect the network cable to your computer firstly, then check the computer and obtain the IP address. If the IP address of the computer is setted by manual, please go to the router and enable the DHCP server to obtain the IP address;
   A fire on pHCP server check if the computer can access the
- 4. After enable the DHCP server, check if the computer can access the Internet normally. (Note: If the computer displays the DHCP mode, then it can get the IP address and access the Internet normally); 5. Connect the network cable to the device and reset the new connection.
- C) Wifi password reason
- Check the WiFi password connected of the camera is same as the WiFi password of the connected router.
   Check if the entered WiFi password has space or special characters(@,#,%,&).
- D) Disconnected 5Ghz WIFI, unable to connect to wifi
- 1.Turn off the 5Ghz network and keep the 2.4Ghz network. Disconnect the router and then restart the camera; 2.WiFi name naming cannot have "5Ghz" words.
- 21

### 3) Camera match the wifi successfully, but can't hear the voice of camera

1.Reset the camera, then power off and reconnect the camera (Only reset can remove local data ); 2.Put the phone as close as possible to the camera and router when it is connecting;

11

3.Please turn off the 5GHz wifi. 4) No pop-up message for motion detection alarm

2.1 Detection Alarm Messages

Click All messages, there is a video viewing portal in each alarm message. If the cloud storage is purchased, it will jump to the event recording recorded by cloud storage; if the cloud storage is not purchased and there is a SD card recording, it will jump to the event recording recorded by the SD card; if there is neither a

oud storage recording nor a SD card recording, it will jump to real-time video.

Support record the latest 14 days' event recordings. 90 days free trial. 4 plans can be chosen as your needs.

 $\times$  10 0  $\square$   $\Rightarrow$  12 0 0  $\square$   $\Rightarrow$ 

 Image: Cloud
 Image: Cloud<

All • Motion Detection

ота 01:29 рм 12:32 ам 12:23

(2.2)

Littlelf Smart Home Camera

The shortcut to check detection alarm messages.

2.2 Video Cloud Storage

Recent

(2.1)

Motion Detection

Littlelf Smart Home Camera 🟒 <

- 1.Open permission setting in the system settings of mobile device to allow Littlelf Smart APP to receive message push noti fication; 2.After some Android phones exits the background, it is not possible
- to receive the alarm push information; 3.Turn off motion detection in APP;
- 5) Motion detection messages prompt frequently
- 6) After inserting SD, it displays damaged

- 8) Watch videos with the same camera on different devices but the shared accounts only have the rights to watch, snapshot and record

## devices to view the video and use any function.

- 9) The scenarios for the reset key

10) What to do if there is no solution in Q&A?


You can log on to Littlelf website: www.littlelf.com, ask for help online. 22

- SMS and email reminders are not supported at this time. If motion detection sensitivity is too high, light changes also can cause alarm;
   Reduce sensitivity of alarms (recommended low level). 1.Before inserting the SD card, Disconnect the power. Connect the
- power to start after plugging in the card; 2.The SD card must be formatted on the computer before using the SD card; 3.When choosing SD, please choose genuine.
- Please refer to the page 22
- 1. The master account can share the video to other account without limit quantit

# 2.The main account name and password also could be logged in on other

- Reset wifi information.
   Wifi exception before connecting to the camera
   wifi password error
- 5.replace new wifi


- 7) No playback record after insert the SD card

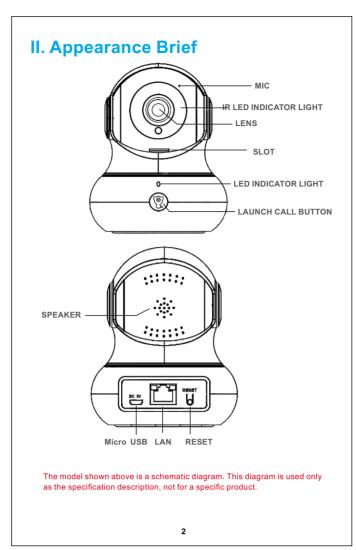

### 2.5 Auto-Tracking Movement Turn on motion tracking, the camera will follow the movement of the object

when it detects the object is moving. 2.6 Playback

Accessing to the real-time video, enter the playback interface. Then you can capture pictures, watch and record video during the time you need.

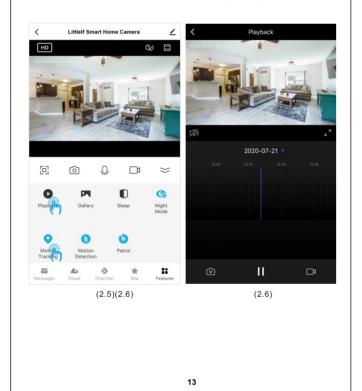

# X. After-Sales Service Support

If you encounter any problems in the process of using, you can get support in the following ways:

1) Visit the official website: www.littlelf.com, get online support. Send your problems to Email: support@littleff.com.
 Call After-sales service hotline: 0086-755-28483693.

(Note: Due to time difference, the working time is GMT+8 and the hotline is available between 10:30am---20:00pm on the working days).

# XI. Requirements for Power Supply

This product is suitable for 5V2A power adapter only.

[Operating Requirement]


Please transport, use and store camera within the allowable humidity and temperature range. Please avoid rain water and other liquids flowing into the camera to avoid damage to internal components.

Do not use in strong lightning weather to avoid damage to internal components.

Please pay attention to the maintenance and maintenance of the camera of the camera. If you need to clean, please wipe it with dustless cloth.

24

Littlelf Home S	ecurity Camera			
Lens		Glass, 3.6mm	length,F2.1	
Sensor		High Definition	Color CMOS Sensor	
Resolution		2.0 Megapixel	(1920x1080)	
Microphone		Built-in		
Speaker		Built-in 8Ω, ≤1	N	
IR LEDs		8 pcs LEDs 12	0° @850nm in series	
Pan & Tilt Angle		Horizontal 350	°, vertical 105°	
Infrared mode		Automatic or M	lanual	
Audio Compress	sion	AAC/G.711, Tv	vo-way voice intercom	
Power Supply		DC 5V, ≤2A		
Net Weight/Dime	ensions	285g/93*93*114.5mm		
Connectivity		1.WIFI : 2.4GHz ( not support 5 GHz), IEEE8.02.11b/g/n 2.Port Ethernet (LAN): 10/100Mbps RJ-45 interface -10°C~50°C(14°F~122°F) @humidity		
Working Condition	ons		condensation	
Certificates		CE, RoHS, FC	С	
LED Indicator	Workin	ig Status	Solution	
Red Lighting	Network is disc	-	Check the network is connected normally;	
Red Light Flashes Quickly	1.Restore factory settings (Resetting); 2.The camera just powered on, waiting for the connection.		Waiting the camera to connect the network	
Blue Lighting	Normal Status		1	
Blue Light Flashes Quickly	Wifi Configuring	9	1	
Off	Power Off		Check the camera is powered on.	
Off	The status indic turned off in the		Turn on the status indicator on the APP	

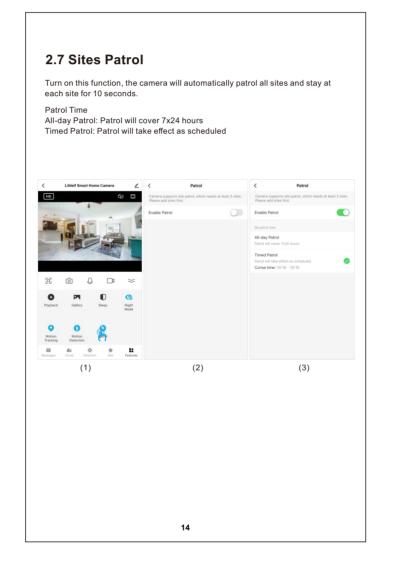

# XII. Warranty Description

- 1. The warranty period of this product is one year from the date of purchase. During the warranty period, we will give free repair and replacement to the quality of the product under normal use. 2. The following circumstances are not covered by warranty. We only
- provide paid service. Please note that: A) Improper installation, incorrect use, unauthorized maintenance,
- modification, accident caused device failure or damage caused by human causes. B) Failure or defect caused by improper use of the environment or
- C) Failure or damage to settings caused by the force majeure, such as earthquakes, fires, floods, lightning strikes, etc.
- D) No product serial number, warranty card, bar code not recognized E) Beyond the warranty period.

Warranty Card

1. Please fill out the warranty card carefully and keep it in good condition. Please use this card to get the maintenance service. The right to interpret and modify the contents in the warranty card shall be owned by the company.


W	arranty Card
	g this product. Please fill in ving information.
Product Name:	User Name:
Product MAC:	Tel.:
Purchase Date:	Fax:
Dealers:	Post Code:
Tel.:	Mailbox:
Question Description:	Address:
	25




Moderate Rain Moder	
Common Fuettons  Littlelf Smart Camera  Little Smart Camera  Li	Inter a substance of the
Littlelf Smart Camera Littlelf Smart Camera Common Functions ~	
Littleif Smart Camera Common Functions ~	
Common Functions*	
ome Smart Me	
	) © 0 ⊏₁ «"
(1) (2)	(2)
(1)	

## 2. Accounts Registration


Open the Littlelf smart APP, click "Agree" of privacy policy and then register an account with a mailbox or mobile number, after registering successfully, log in the Littlef smart APP.

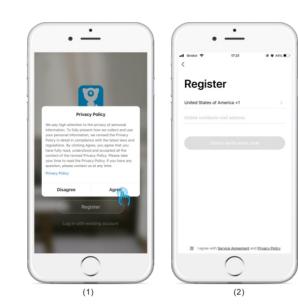



 Please tick "Agree" and "Service Agreement and Privacy Policy";
 ) If the verification code is sent out over time due to network problems, please try again later; 3) If register with mailbox, please check the verfication code in spam mailbox if you didn't receive.

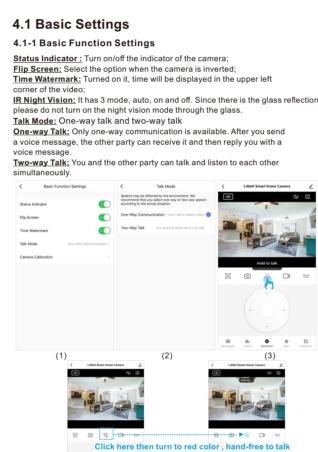

(4-1) 16 (4-2)

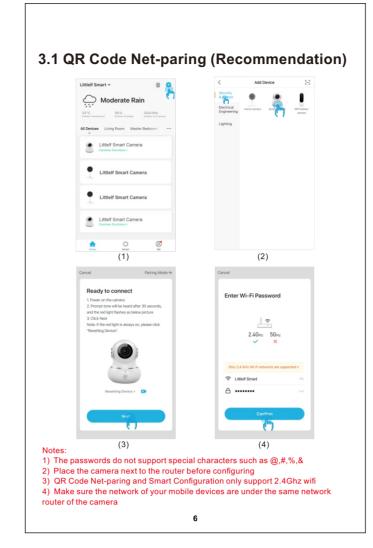

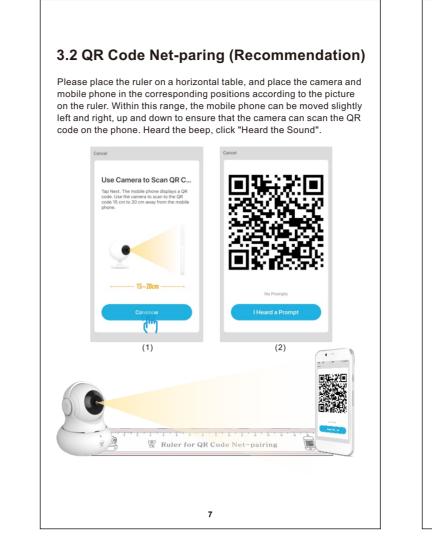

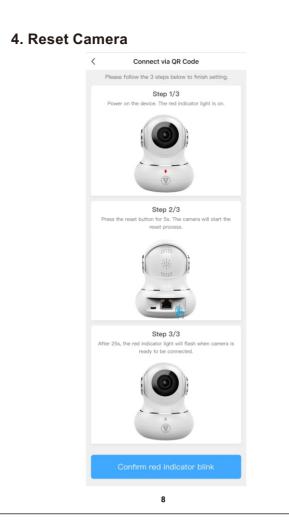


Room Management 6 Room(s) >		8	< н
Interme Management       Imagement         Imagement       Imagement         Imag	Littlelf Littel Smartgodvskyline.com		Littlelf Smart
FAQ & Feedback       • > >         More Bervices       >         Settings       >         Settings       >         More Services	Home Management	° <mark>B</mark> r≥	Add new
More Services     Nore Services     Services     Services     Services     Services     Service	Message Center	• >	
© Settings >			
Image: Second	More Services		
Item Anne Linter Smar > Room Management @ Room(d) > Home Location > Home Locat	Settings		
Home Name Littlef Smear > Room Management & Bitombil > Home Location > Home Location > Home Location > Home Location > Home Control Therefore the control > Littlef Smear > Littlef Smear > Home control > Littlef Smear > Littlef Smear > Littlef Smear > Home control > Littlef Smear	. ,		
Room Management 6 Room(s) > Home Location >> Home Management Account Term Members Unter I Home Control Thome Control >> Linear Home Control Thome Control >> Earth Rode Control =>			
Home Location > Home Location > Home Monitors Linear Monitors Only Affair access United Theoreticated access to the Section Se			Name Enter
Home Manibers Only after acces Utitief F Utitief General General D Family Role Family Role Family Role			Region Unite
Littleff     Littleff     Littleff     Littleff     Smart(goctvskyline.com     Family Rele	Home Members		
Add Member	Littlelf Smart@cctvskyline.com	Home owner >	
	Add Member		
Delete family			
	Utitielf Littleff Gmart@cctvskyline.com	Home owner >	Only after ac
Delete family			

# 4.2 Detection Alarm Settings

Before using movement detection alert, please plug a TF card into the camera or have successfully purchased cloud storage service.

Motion Detection: Turn on motion detection, if the camera detects Alarm Timer Settings: Customize the set time to turn motion detection on Alarm Timer Settings: Customize the set time to turn motion detection on or off

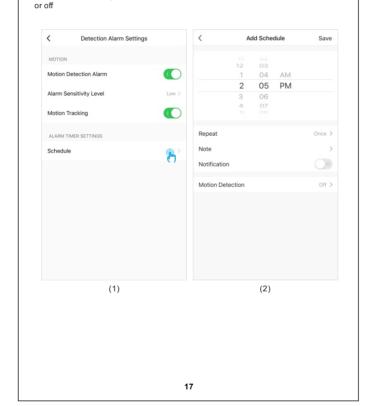

# 4.3 Memory Card Settings

The camera has microSD card slots and local backup, supports a TF card up to 128GB. You can choose recording mode and set the schedule to open or close the switch.

< Store	age Settings	<	Recording Mode		< /	dd Sched	sule	San
STORAGE CAPACITY		Event Rec	ording					
Total Capacity	29.750	Non-Stop			1	04	AM	
Jsed	25.060	Non-Stop		0	3	05	PM	
Remaining Capacity	4,890				4			
STORAGE SETTINGS					Repeat			Once
Local Recording					Note			
Recording Mode	Non-Stop >				Notification			
ichedule					Motion Detection			01
	Format							
	(1)		(2)			(3	3	

Notes: 1.If the video saved by SD card, please turn on the <u>Local Recording</u> in the memory card settings. 2. The SD card must be formatted on the computer before inseting the SD card.

18

 3. Unpulg the power cable the power before inserting the SD card, otherwise it will burn the SD card.
 4. One memory card can only correspond to one camera. If you want to use it in other cameras, please format it firstly.

# VI. Help Center&More Service

In the help center, you can find the solution of the problem. Click all, you can find more solution of the issue. If all the above solutions can't solve your problem, you also can submit the question by clicking the "Report Issue". Then you will get the

11 24 110015.			
	8	<	
0 Littlelf		FAQ	
Littleff Smarh@octvskyline.com		I cannot find the way to buy the cloud service?	
Home Management		How do I use Echo Show?	
Message Center	• •	How do I screen notifications?	
		Why can't I receive pushed messages from the app?	
	3	Is there a way to give someone else permission to control my devices via their App account?	
More Services		Does the phone have to be controlled under the same network (Wi-Fi) as the device?	
Settings		How to configure Tap-to-Run and Automation?	
		The light changed from flashing to regular,but it still fails to connect?	
		More does the camera use the scanning OB code to	
ô ò	ø	Network Diagnosis Pepert Issu	
(1)	Ma.	(2)	
< All		< Report Issue	
My Devices		Right here, please describe details of the issue and no	010
1 👗 1		the path of the problem subject in the app. Clear and complete information can help us quickly locate and solve the problem.	
WiFi ballery c Littleff Smart ameraV300 Hom Camera Home Camera			
More		Device: Litterf Smart Home Camera 0	300
Device networking issues		Issue Type Select	
App use issues		Contact Method Mobile phone number/Email address	
Third-party control issues		Occurrence 7/20/2020 15:38	
		Upload Image(3 at most)	
		+	
(0)		(4)	
(3)			

VII. Installation Instructions 1. Select the installation position and drill holes on the suitable installation surface. Knock the expansion bolt into the hole.
 Screw the support. 4. Rotate the camera to the bracket (product installation view). 

